

# **Very High Load Capacity Air Bearing Spindle for Large Diamond Turning Machines**

**Contract No. NNX10CF18P (SBIR 2009-1) (MSFC)**

## **Mirror Technology SBIR/STTR Workshop**

**June 7<sup>th</sup> to 9<sup>th</sup>, 2010**

**Millennium Harvest House, Boulder, Co.**

**John M. Casstevens  
Dallas Optical Systems, Inc.  
972-564-1156**

These SBIR data are furnished with SBIR rights under Contract No. NNX10CF18C. For a period of 4 years, unless extended in accordance with FAR 27.409(h), after acceptance of all items to be delivered under this contract, the Government will use these data for Government purposes only, and they shall not be disclosed outside the Government (including disclosure for procurement purposes) during such period without permission of the Contractor, except that, subject to the foregoing use and disclosure prohibitions, these data may be disclosed for use by support Contractors. After the protection period, the Government has a paid-up license to use, and to authorize others to use on its behalf, these data for Government purposes, but is relieved of all disclosure prohibitions and assumes no liability for unauthorized use of these data by third parties. This notice shall be affixed to any reproductions of these data, in whole or in part.

# **Very High Load Capacity Air Bearing Spindle for Large Diamond Turning Machines**

**Contract No. NNX10CF18P (SBIR 2009-1) (MSFC)**


## **OUTLINE**

- **INTRODUCTION**
- **AIR BEARINGS vs. OIL HYDROSTATIC BEARINGS**
- **PROTOTYPE SPINDLE DESIGN**
- **PROGRESS TO DATE**
- **FUTURE WORK & SUMMARY**


# Introduction

- **DT is a proven method of manufacturing aspheric off-axis mirrors to visible quality.**
- **Vertical turning machines are used for very large and heavy parts.**
- **The need for very large diamond turning has been recognized for at least 30 years.**
- **Attempts to meet the need have all failed because no suitable spindle was available.**
- **Oil hydrostatic spindles large enough to carry the load cannot run fast enough because of viscous frictional heat generated as the 4<sup>th</sup> power of the bearing radius.**
- **Air bearings can run at sufficiently high speed to be practical because the viscosity of air is three orders of magnitude less than the lightest liquid lubricant.**
- **Classical metal to metal air bearings do not work for very large capacity because of prohibitive cost and catastrophic failure modes.**
- **Porous graphite air bearings are proven to be sufficiently rugged and reliable.**
- **Development of a giant capacity air bearing spindle is enabling technology for a giant diamond turning machine suitable for manufacture of giant aspheric optics.**

## Cranfield Precision (CUPE) – LDTM 1982

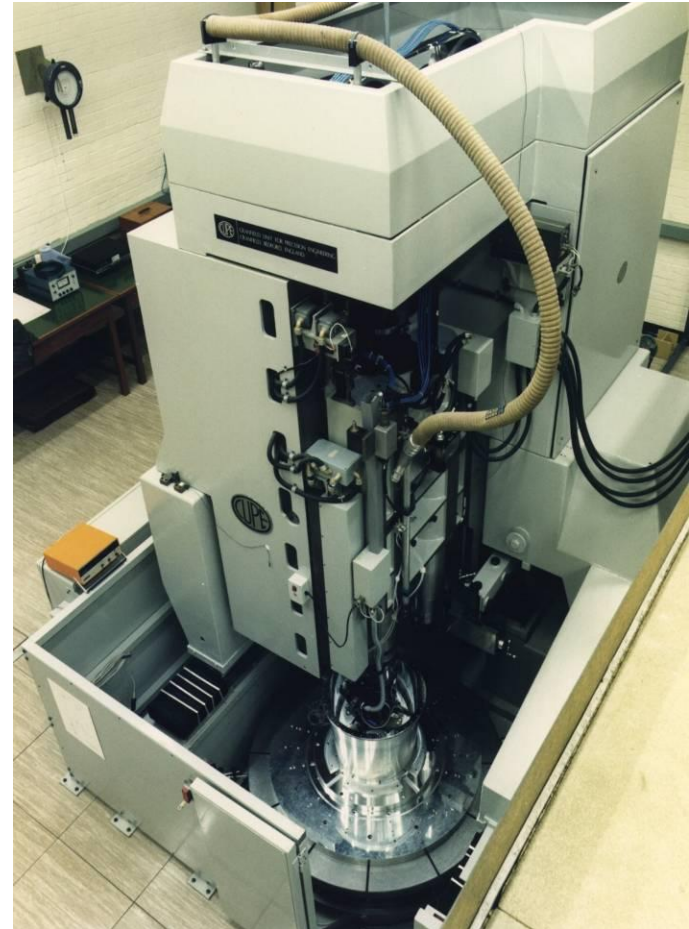

## LLNL 1983 – Large Optics Diamond Turning Machine

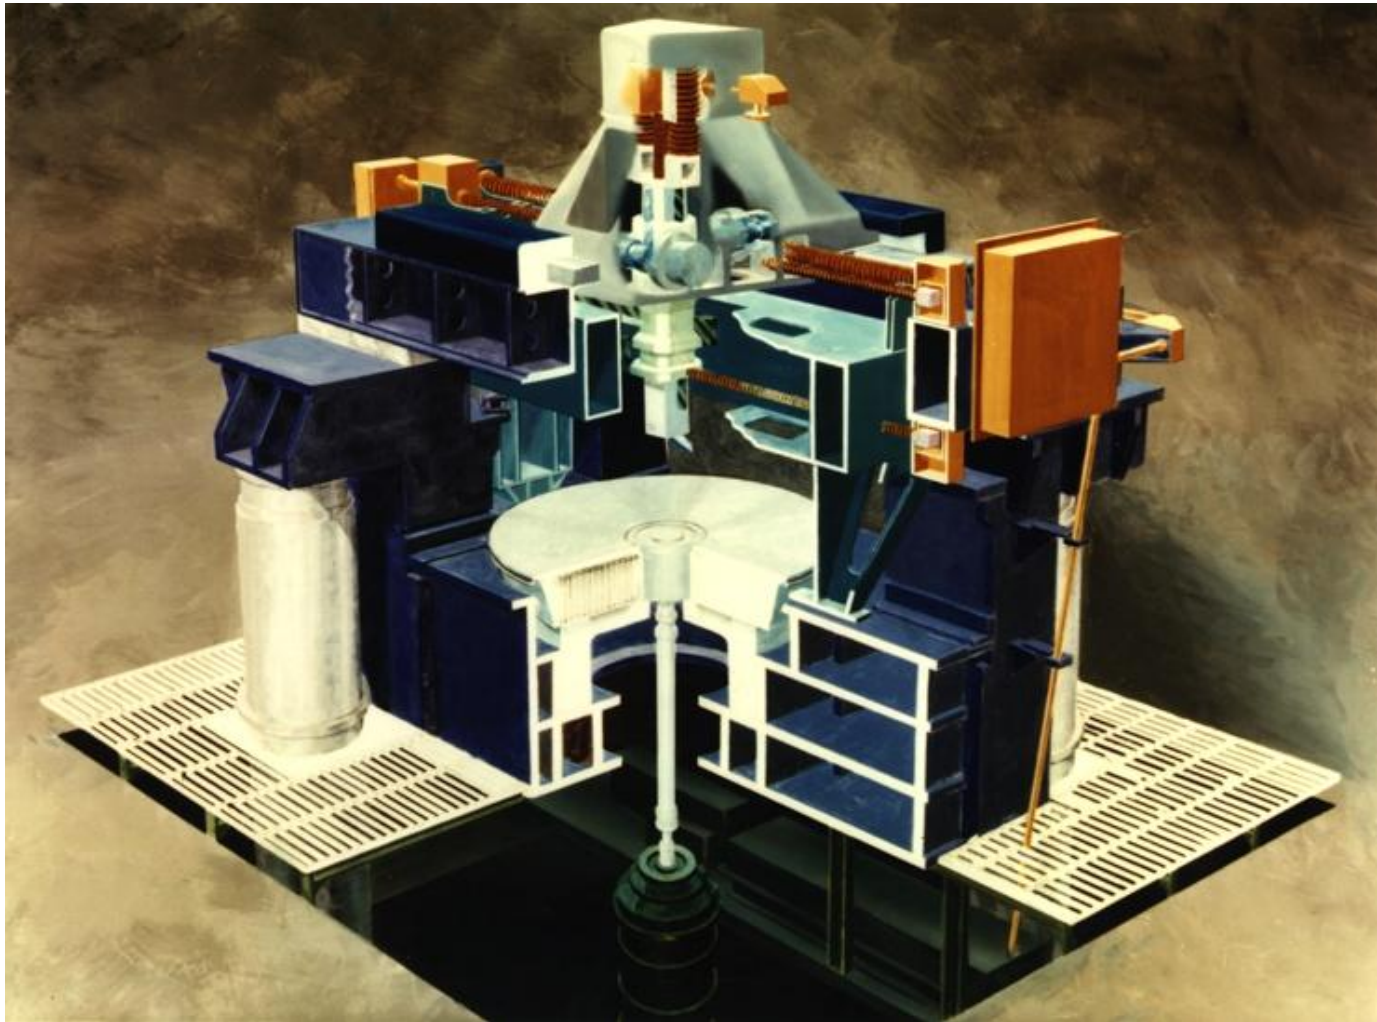

# Comparison of Oil Hydrostatic and Air Hydrostatic Bearings

**Oil hydrostatic bearings tolerances are 25-75 microns (0.001-0.003")**

**Oil hydrostatic bearings and air hydrostatic bearings both have flow induced instability issues "water hammer" which must be carefully controlled.**

**Oil viscosity provides important squeeze film damping which aids control of flow induced instability. Air bearings are very much more sensitive to water hammer effects.**

**Viscous shear frictional heating limits large oil hydrostatic spindles to less than 100 rpm. This slow speed is unacceptable for diamond turning because the finish requirements of optics require a very small tool advance per revolution.**

**Dimensional accuracy requirements demand extreme thermal stability and this requirement increases with part size. The large heat generation of oil hydrostatic spindles at even unacceptably low spindle speeds is a severe problem.**

**Air bearing tolerances are extremely small because of the requirement that the air film must be no greater than about 6 microns (0.0003") to provide the required very high bearing stiffness for diamond turning. Flatness, roundness, squareness < 0.5  $\mu\text{m}$  (0.00002").**



# Spindle Requirements for Giant Optics Diamond Turning

**Fixture weight is usually orders of magnitude heavier than the optic it is designed to hold in a strain-free condition. This spindle development is aimed at producing 3 meter diameter components. This requirement results in the following spindle specification goal.**

**Working load capacity:  $> 89,000 \text{ N}$  (20,000 lbf.)**

**Rotational speed:  $> 1000 \text{ rpm}$**

**Max. spindle motion error, radial, axial, tilt:  $< 125 \text{ nm}$  (5 $\mu$  inch)**

**2.48 Meter Aluminum Mirror Weight: 3000 lb.**  
**Fixture Weight: 3000 lb.**  
**Spindle Thrust table weight: 3000 lb.**





# **Porous Graphite Air Bearing Technology**

**Porous graphite air bearings for ultra-precision turning were developed starting in the early 1960's at the Oak Ridge, Tenn. Y-12 Plant for use in manufacture of nuclear weapons components. This spindle development utilizes the experience of the principal investigator and various others at Oak Ridge in building large air bearings.**

## **Prototype Air Bearing Spindle**

**A prototype air bearing spindle will be used as a vehicle for developing the manufacturing methods to be used on the larger air bearing suitable for use as part of a very large diamond turning machine.**

**Major precision components of the air bearing spindle.**

- Flat thrust bearing plate/spindle faceplate. (lapped)**
- Main thrust bearing graphite bearing material. (lapped)**
- Radial bearing shaft. (Diamond turned NiP plated steel.)**
- Radial graphite bearing. (Lapped to size w/ DT laps.)**
- Bearing pre-load components. (Smaller porous bearing.)**
- Spindle drive shaft and pulley. (Flat belt drive.)**
- Spindle housing and air supply plumbing.**

## **POROUS GRAPHITE TEST AND SELECTION**

- **Porous graphite samples will be tested to determine air flow properties.**
- **Selected graphite material will be fabricated into test bearings for evaluation of impregnation and stability against “water hammer” flow induced instability.**
- **The bearing performance testing will select graphite grade for fabrication of the large air bearing parts.**
- **Eight grades of graphite from five suppliers are in in testing at this time.**

## Disks of porous graphite ready for flow testing.



# SURPLUS METAL TO METAL AIR BEARING ROTARY TABLE






## THRUST BEARING PLATE/FACEPLATE OF 30" DIA. AIR BEARING ROTARY TABLE





# Housing of Air Bearing Rotary Table to be Modified

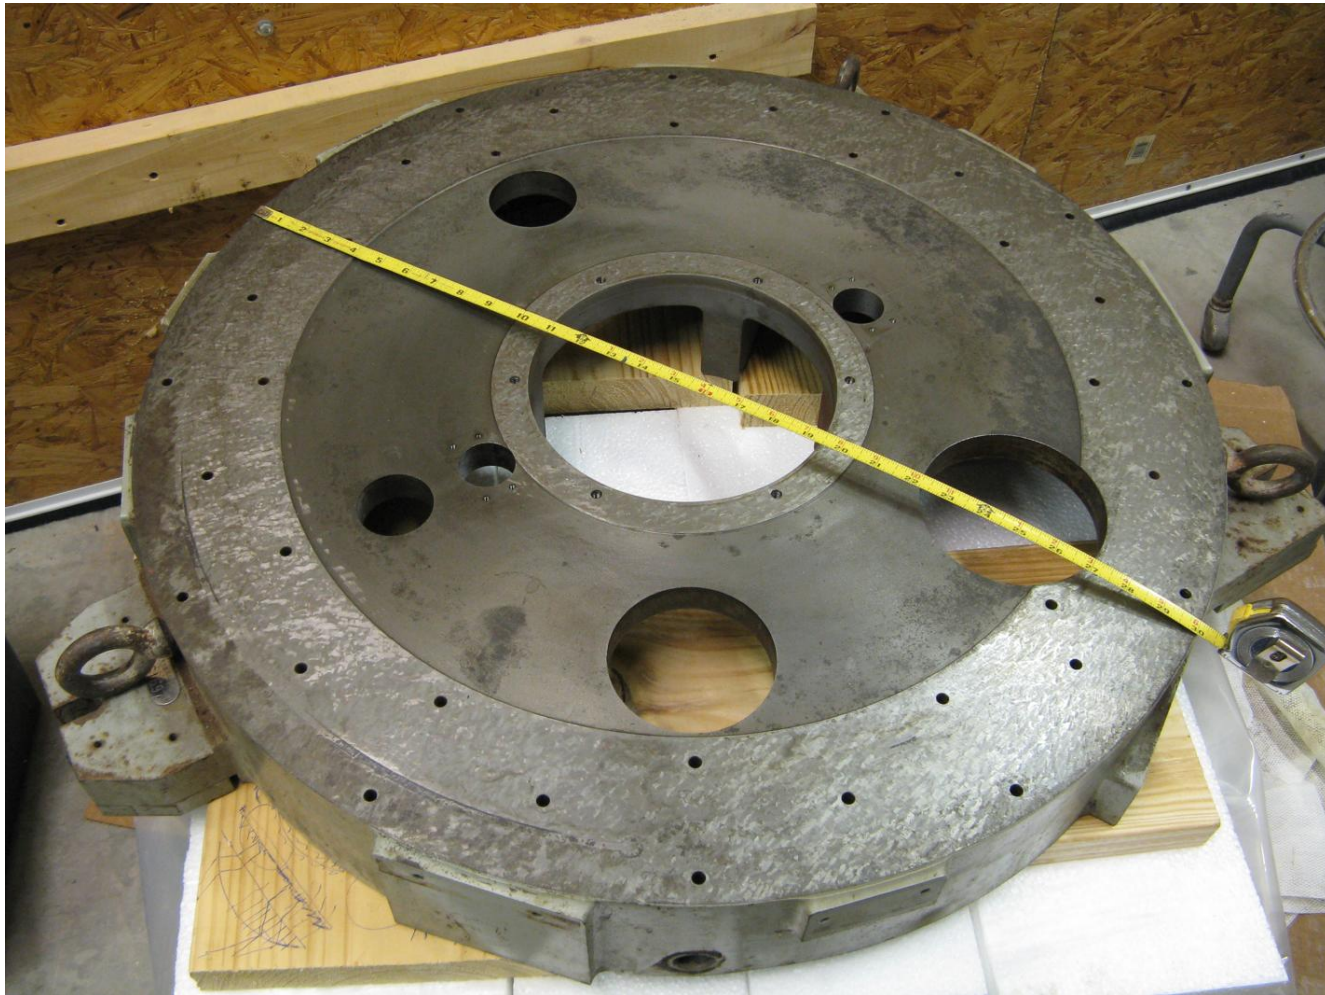




# PROTOTYPE AIR BEARING SPINDLE DESIGN

Drawings for all the components of the prototype spindle are complete and fabrication of the required metal components is underway at this time. Expected load capacity of the prototype spindle: 16,000 lb. max; 8000 working cap.

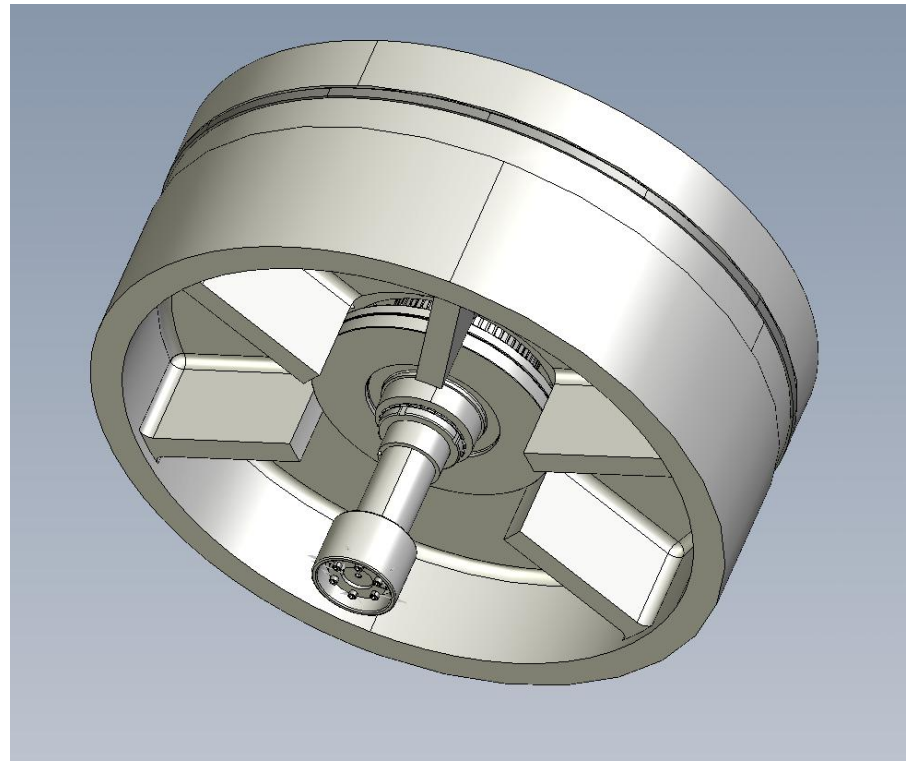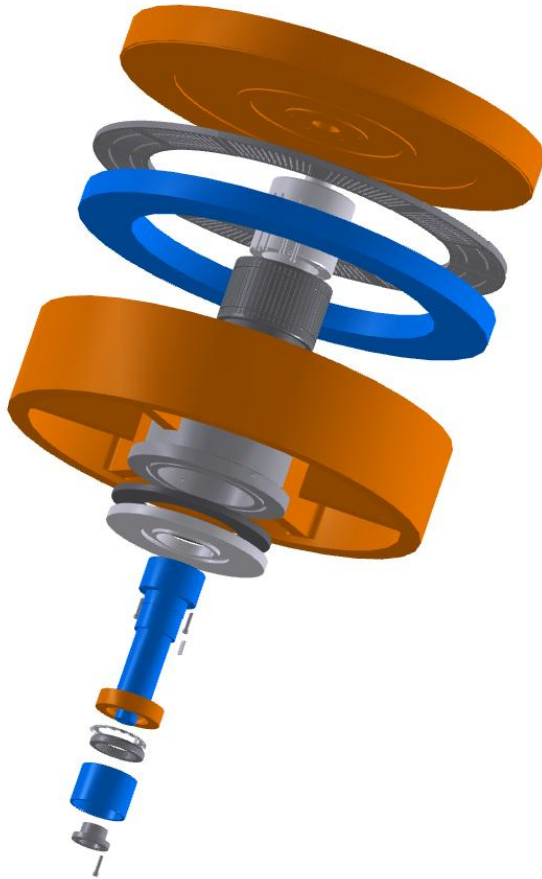

# Moore Tool Co. Three Meter Diamond Turning Machine Concept

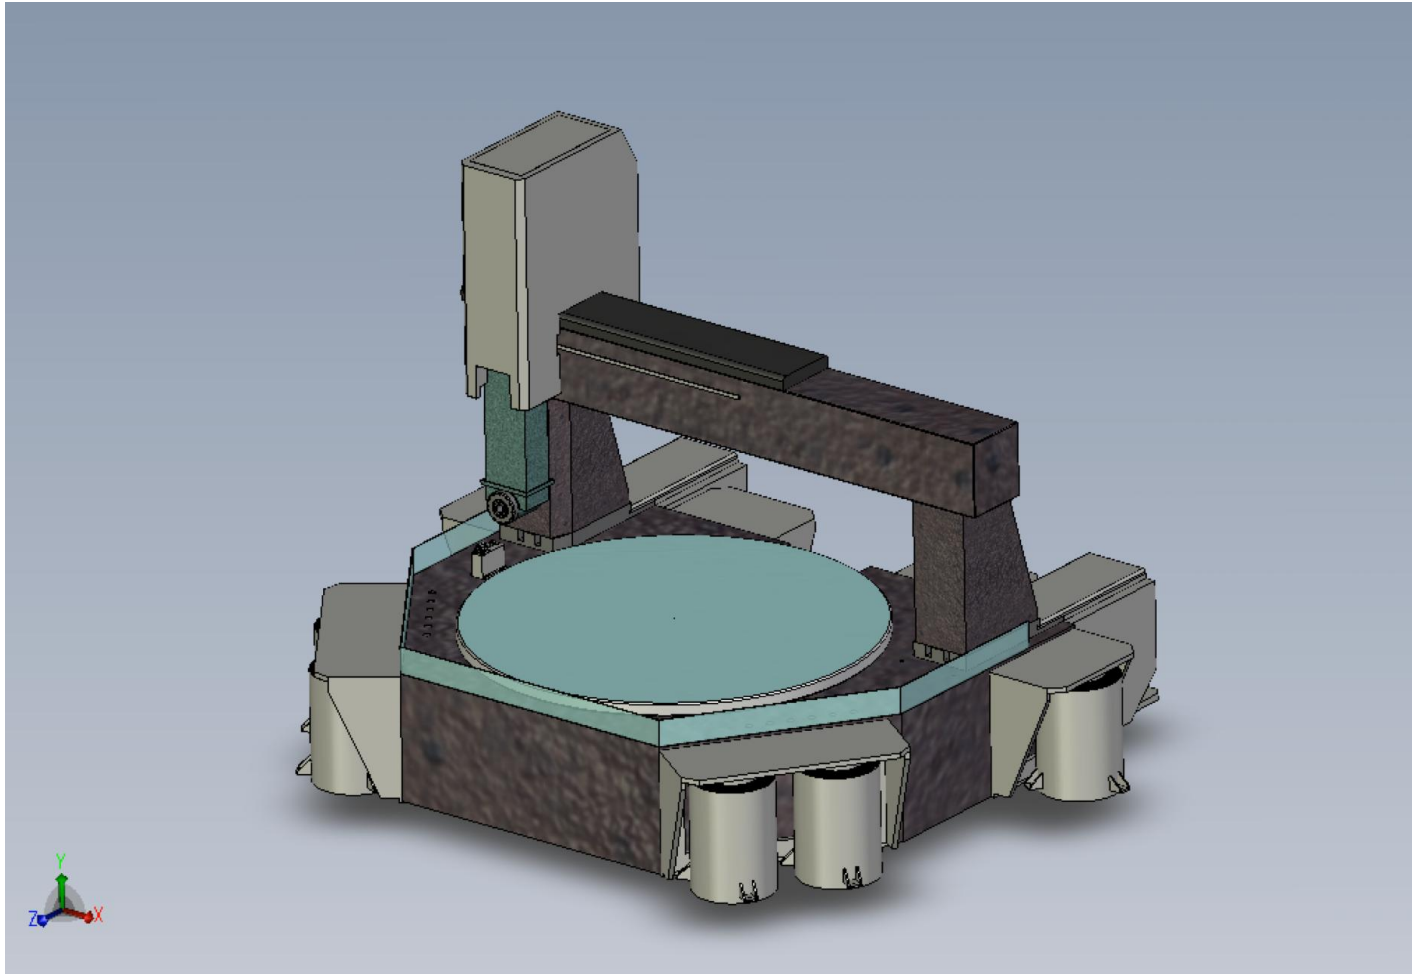


**Diamond turning of an X-ray telescope mandrel is a similar process to be used in diamond turning the air bearing radial bearing shaft.**





# Design of 98kN (20,000 lb.) Capacity Air Bearing Spindle

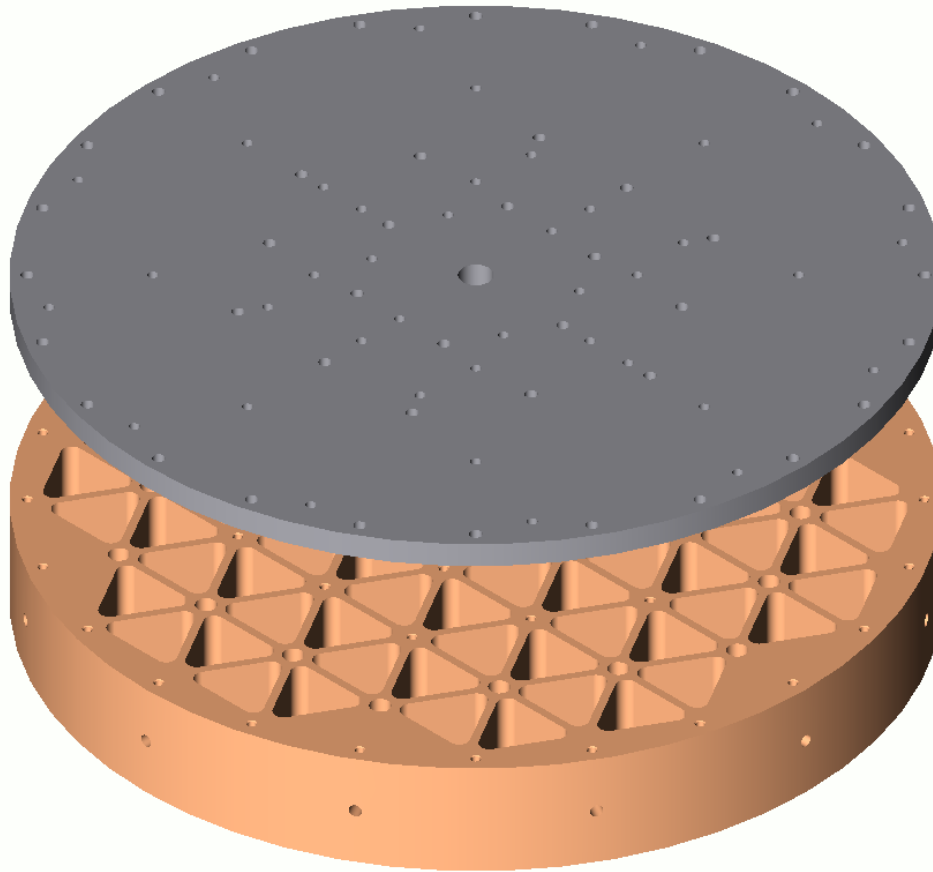

# SUMMARY

**Diamond turning can produce visible quality highly aspherical surfaces very quickly with machined reference surfaces to allow easy alignment of multiple complex optical contours.**

**Diamond turning enables high rate production manufacture of large light weight mirrors at an affordable cost.**

- **The very large load capacity porous graphite air bearing is the key to enabling a practical very large optics diamond turning machine.**
- **The porous graphite air bearing can run at high speed without the excessive heat generation of oil hydrostatic spindles.**
- **Porous graphite allows a very high reliability, very rugged spindle.**